



Stormproof®

DESIGN/INSTALLATION INFORMATION



IMPORTANT NOTICE

THE STORMPROOF® LOAD TABLES INDICATE THE .016 NOMINAL THICKNESS PANELS CAN OBTAIN A 20# LIVE LOAD ON 4'-0" OR 5'-0" CENTERS. PLEASE KEEP IN MIND THESE ARE UNIFORM LIVE LOADS AND WILL NOT SUPPORT A 200 POUND MAN STANDING ON ONE SQUARE FOOT. FROM AN ERECTABILITY AND INDUSTRY STANDARD POINT OF VIEW, IT IS RECOMMENDED THAT YOU SHOULD NOT SPAN THE PANELS MORE THAN 3'-0".

ALWAYS INSPECT EACH AND EVERY PANEL AND ALL ACCESSORIES BEFORE INSTALLATION. NEVER INSTALL ANY PRODUCT IF ITS QUALITY IS IN QUESTION. NOTIFY METAL DEPOTS IMMEDIATELY IF ANY PRODUCT IS BELIEVED TO BE OUT OF TOLERANCE, SPECIFICATION OR HAS BEEN DAMAGED DURING SHIPMENT.

IF THERE IS A CONFLICT BETWEEN PROJECT ERECTION DRAWINGS PROVIDED OR APPROVED BY THE MANUFACTURER AND DETAILS IN THIS MANUAL, PROJECT ERECTION DRAWINGS WILL TAKE PRECEDENCE.

©Copyright NCI Group, Inc. 2017 All Rights Reserved

The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the North American Specification for the Design of Cold-Formed Steel Structural Members published by the American Iron and Steel Institute to facilitate design. This Specification contains the design criteria for cold-formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project job site in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metal Depots reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.metaldepots.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs, or panel profiles. Projects should be engineered to conform to applicable building codes, regulations, and accepted industry practices. Insulation is not shown in these details for clarity.


PRODUCT INFORMATION

UL 90 Construction NumbersV-4
Section PropertiesV-5
Product ChecklistV-6
Fastener PatternsV-7

DETAILS

RidgeV-8
EndlapV-9
ValleyV-10
HipV-11
RakeV-12
EaveV-13
GutterV-14
Slope ChangeV-15

STORMPROOF® 36" Coverage

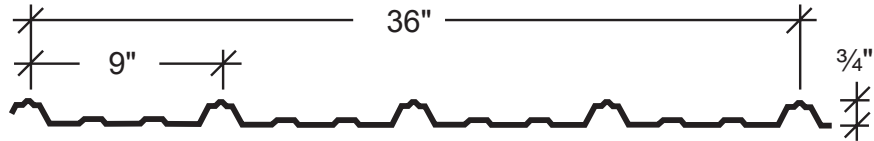

Panel Section Properties											
Panel Gauge	Fy (Ksi)	Weight (Psf)	Va (Kips/Ft)	Pa,end (Kips/Ft)	Pa,int (Kips/Ft)	Negative Bending			Positive Bending		
						Ixe (In. ⁴ /Ft.)	Sxe (In. ³ /Ft.)	Maxo (Kip-In./Ft.)	Ixe (In. ⁴ /Ft.)	Sxe (In. ³ /Ft.)	Maxo (Kip-In./Ft.)
29	60 *	0.63	0.361	0.139	0.191	0.0042	0.0115	0.459	0.0079	0.0138	0.596
26	60 *	0.82	0.494	0.249	0.352	0.0061	0.0162	0.664	0.0110	0.0193	0.854

* Panels are made from 80 ksi yield material. Flexural effective yield strengths vary by direction of bending. Shear and web crippling capacities have been determined using an effective yield strength of 60 ksi.

NOTES:

- All calculations for the properties of StormProof panels are calculated in accordance with the 2012 S100 AISI "North American Specification for the Design of Cold-formed Steel Structural Members".
- Va = allowable transverse shear per foot of panel width.
- Pa,end = allowable web crippling load at the panel end support per foot of panel width.
- Pa,int = allowable web crippling load at interior panel supports per foot of panel width.
- Ixe = effective moment of inertia per foot of panel width at nominal moment capacity.
- Sxe = effective section modulus per foot of panel width at nominal moment capacity.
- Maxo = allowable bending moment based on initiation of yielding.

The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the *North American Specification for the Design of Cold-Formed Steel Structural Members* published by the American Iron and Steel Institute to facilitate design. This Specification contains the design criteria for cold-formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.

STORMPROOF® 36" Coverage

ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT

29 Gauge thickness								
Span Type	Load Type	Support Spacing						
		2 Ft.	2.5 Ft.	3 Ft.	3.5 Ft.	4 Ft.	4.5 Ft.	5 Ft.
1-span	NEGATIVE WIND LOAD	76.55	48.99	34.02	25.00	19.14	15.12	12.25
	LIVE LOAD/DEFLECTION - L/60	99.36	63.59	44.16	32.45	24.84	19.63	15.90
	LIVE LOAD/DEFLECTION - L/180	86.19	44.13	25.54	16.08	10.77	7.57	5.52
	LIVE LOAD/DEFLECTION - L/240	64.64	33.10	19.15	12.06	8.08	5.67	4.14
2-span	NEGATIVE WIND LOAD	93.95	61.31	43.04	31.84	24.48	19.40	15.75
	LIVE LOAD/DEFLECTION - L/60	73.99	47.92	33.50	24.71	18.97	15.02	12.18
	LIVE LOAD/DEFLECTION - L/180	73.99	47.92	33.50	24.71	18.97	15.02	12.18
	LIVE LOAD/DEFLECTION - L/240	73.99	47.92	33.50	24.71	18.97	14.32	10.44
3-span	NEGATIVE WIND LOAD	114.79	75.48	53.16	39.06	29.90	23.63	19.14
	LIVE LOAD/DEFLECTION - L/60	86.59	59.35	41.60	30.74	23.62	18.71	15.19
	LIVE LOAD/DEFLECTION - L/180	86.59	59.35	41.60	30.74	21.00	14.75	10.75
	LIVE LOAD/DEFLECTION - L/240	86.59	59.35	37.34	23.51	15.75	11.06	8.07
4-span	NEGATIVE WIND LOAD	107.99	70.82	49.86	36.95	28.44	22.56	18.33
	LIVE LOAD/DEFLECTION - L/60	83.35	55.57	38.92	28.74	22.08	17.49	14.19
	LIVE LOAD/DEFLECTION - L/180	83.35	55.57	38.92	28.74	22.08	15.73	11.47
	LIVE LOAD/DEFLECTION - L/240	83.35	55.57	38.92	25.07	16.80	11.80	8.60

26 Gauge thickness								
Span Type	Load Type	Support Spacing						
		2 Ft.	2.5 Ft.	3 Ft.	3.5 Ft.	4 Ft.	4.5 Ft.	5 Ft.
1-span	NEGATIVE WIND LOAD	110.60	70.79	49.16	36.12	27.65	21.85	17.70
	LIVE LOAD/DEFLECTION - L/60	142.30	91.07	63.24	46.46	35.57	28.11	22.77
	LIVE LOAD/DEFLECTION - L/180	120.15	61.52	35.60	22.42	15.02	10.55	7.69
	LIVE LOAD/DEFLECTION - L/240	90.11	46.14	26.70	16.81	11.26	7.91	5.77
2-span	NEGATIVE WIND LOAD	133.88	87.51	61.50	45.51	35.01	27.76	22.54
	LIVE LOAD/DEFLECTION - L/60	106.51	69.08	48.32	35.66	27.38	21.68	17.59
	LIVE LOAD/DEFLECTION - L/180	106.51	69.08	48.32	35.66	27.38	21.68	17.59
	LIVE LOAD/DEFLECTION - L/240	106.51	69.08	48.32	35.66	27.38	19.84	14.46
3-span	NEGATIVE WIND LOAD	163.28	107.59	75.97	56.39	43.20	34.14	27.65
	LIVE LOAD/DEFLECTION - L/60	131.06	85.45	59.96	44.34	34.09	27.01	21.92
	LIVE LOAD/DEFLECTION - L/180	131.06	85.45	59.96	43.78	29.33	20.60	15.02
	LIVE LOAD/DEFLECTION - L/240	131.06	85.45	52.14	32.83	22.00	15.45	11.26
4-span	NEGATIVE WIND LOAD	153.71	101.00	71.20	52.79	40.67	32.27	26.22
	LIVE LOAD/DEFLECTION - L/60	123.00	80.05	56.11	41.46	31.86	25.24	20.48
	LIVE LOAD/DEFLECTION - L/180	123.00	80.05	56.11	41.46	31.20	21.91	15.98
	LIVE LOAD/DEFLECTION - L/240	123.00	80.05	55.47	34.93	23.40	16.44	11.98

Notes:

- Strength calculations are based on the 2012 S100 AISI "North American Specification for the Design of Cold-formed Steel Structural Members".
- Allowable loads are applicable for uniform loading and spans without overhangs.
- LIVE LOAD/DEFLECTION capacities are for those loads that push the panel against its support. The applicable limit states are flexure, shear, combined shear and flexure, web crippling at end and interior supports, and the strength-level load deflection limit shown.
- Capacities for LIVE LOAD/DEFLECTION pressure loading are determined as the smaller of the LIVE LOAD/DEFLECTION - Strength and the required deflection limit values listed.
- NEGATIVE WIND LOAD capacities are for those loads that pull the panel away the support. The applicable limit states are flexure, shear, combined shear and flexure, and a deflection limit of L/60 under 10-year wind loading.
- Panel pullover and screw pullout connection capacities need to be checked separately for the particular fasteners employed using tributary area-based connection loads.
- Effective yield strength has been determined in accordance with section A2.3.3 of the 2012 AISI S100 specification.
- The use of any accessories other than those provided by the manufacturer may damage panels, void all warranties and will void all engineering data.
- This material is subject to change without notice. Please contact MBCI for most current data.


The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the *North American Specification for the Design of Cold-Formed Steel Structural Members* published by the American Iron and Steel Institute to facilitate design. This Specification contains the design criteria for cold-formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.

Panel Fastener Locations

Panel Ends



Interior



APPLICATION



PREVAILING WIND



NOTE:

1. The above are typical fastener spacings. However they may not be appropriate for all applications. Consult a professional engineer for use on any specific application.



Call us, visit us on the web or stop by the store nearest you to learn more about our product offerings. We look forward to servicing your roof, your home and you.

800.531.2731 | www.metaldepots.com

NCI Building Systems | NCS NYSE

STAY IN TOUCH
facebook.com/metaldepots



Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metal Depots reserves the right to discontinue products at any time or change specifications and /or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.metaldepots.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.